



# Products and Solutions



## Contact Details

**Shenzhen EEnovance Energy Technology CO., LTD**  
Website: [www.eenovance.com](http://www.eenovance.com)  
Email: [info@eenovance.com](mailto:info@eenovance.com)  
Telephone: +86 755 8656 6313  
Address: Room 1209, Building 6, Skyworth Innovation Valley, No. 1 Tangtou Road, Shiyan Street, Baoan District, Shenzhen City 518000, GD Prov, China.



# Visionary Insights, Solid Progress

As a comprehensive energy solution provider, we agilely respond to our customers' needs. Insisting data driven and empirical analysis, we gain deep insights into the facts of science, delivering reliable and innovative products with localized services to users worldwide.

Rooted in our engineering DNA, we relentlessly seek breakthroughs in energy technologies with ambition and competency. Together with our global partners, we strive to co-create a sustainable and better life for users throughout the world.





# CONTENTS

01

About Eenovance

01-02

02


Energy Storage Solution

03-04

03

Product

Residential Storage Inverter



SQ 6kW-LV-1P Hpro

05-06

SQ 4/6kW-LV-1P Ecco

07-08

Residential Battery



MANA 5.3/10.6/14.33

09-10

MANA 5.12 Ultra

11-12


RT 5320/RT 11.77

13-14

CHAKRA 2.5-H Pro

15-16

Commercial Battery



RT 5.12-H

17-18

E-MATE-114R-229R

19-20

C&I Storage System



E-MATE 50-61-A Air Cooling ESS (On&Off Grid Application)

21-22



E-MATE 100-221-A Air Cooling ESS (On Grid Application)

23-24



E-MATE 200-233-L Liquid Cooling ESS (On Grid Application)

25-26



E-MATE 200-418-L Liquid Cooling ESS (On Grid Application)

27-28



G-Power 5016-L Battery Energy Storage System

29-30



Commercial Battery Pack

31-32

04

EENOVANCE Cloud

33

05

Case

34

# About Eenovance

## Who we are?

Eenovance is a tech company dedicated to innovative energy storage solutions. Our team of skilled professionals brings a wealth of R&D experience to the table. We offer a variety of products, such as home energy storage inverters, commercial energy storage systems, and batteries. With our proprietary technology, we're here to provide tailored solutions that meet your specific energy needs. Let's work together to find the best fit for you!

## Our Mission

Energy Technologies Build Life Better

## Our Vision

Aspiring to be globally acclaimed energy solution provider

## Our Value

Quest for Truth


Practical Innovation

Diversified Integration


Aspire for Tech

## Our Main Business


### Comprehensive Energy Storage Solutions Provider

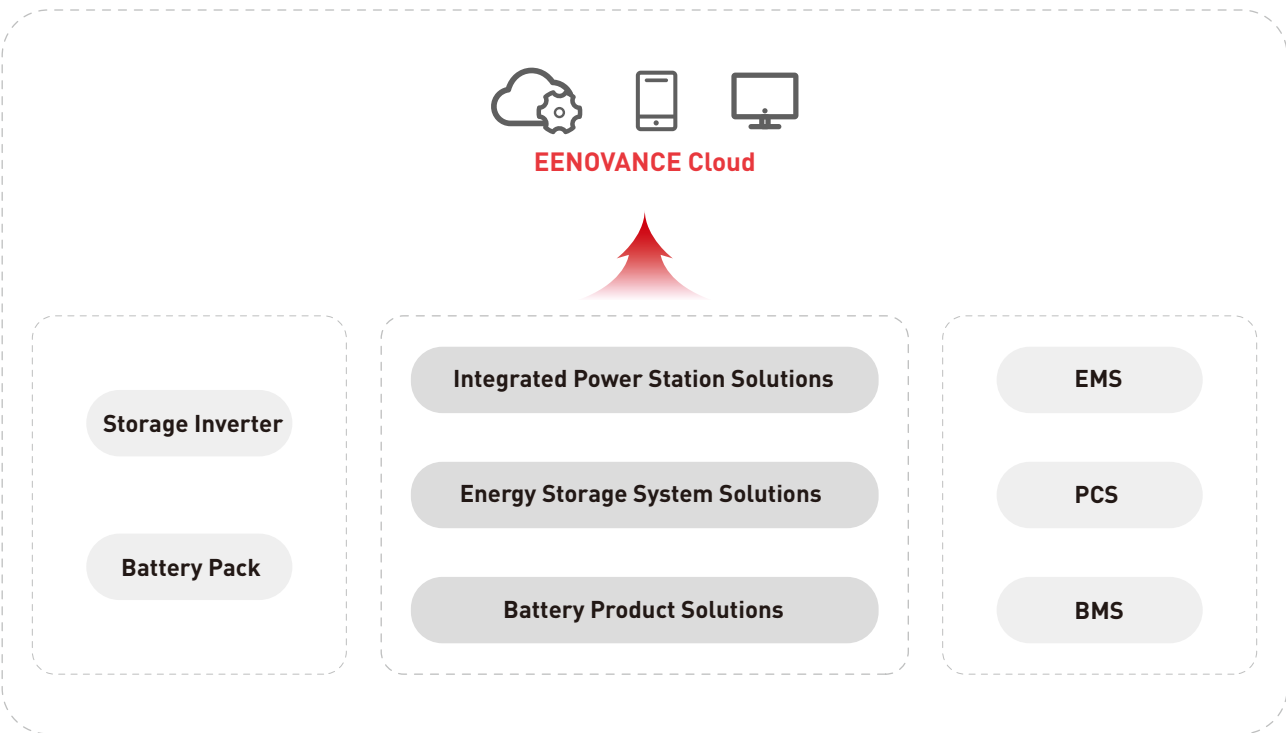


## Why Eenovance




**30%**  
R&D Staff



**20000+m<sup>2</sup>**  
Production Base




**CHUBB**  
Global Products Underwriter




**4+**  
Global Offices and Service Centers


## Professional Team, Reliable Products, Dedicated Services




We approach business development with a calm mindset, supported by a professional and friendly team ready to meet your needs. Our localized teams ensure that our technology and services seamlessly integrate into local communities, enhancing their quality of life. You can rely on us as your immediate partner for support.




We prioritize product research and development and the integration of new technologies, with core self-developed capabilities in EMS, PCS, and BMS.



We maintain strict standards in our manufacturing processes, sourcing key components only from top international brands like Panasonic, ST, and Socomec. We prioritize safety and quality, ensuring our customers receive reliable and secure products you can trust.



Our products have received international certifications from UN, IEC, UL, NFPA, and are widely used in many countries around the world. They've been tested in the market and deliver reliable performance you can count on.



We adhere to international ESG standards and collaborate with our upstream and downstream partners to sign corporate social responsibility agreements, jointly fulfilling our corporate social responsibilities.





## Energy Your Home, No Bill Worries.

We offer a smart home energy storage solution with high-efficiency inverters, batteries, and smart monitoring. It will keep your home powered up with comprehensive green energy, making you less reliant on the grid, and let city and countryside homes live self-sufficiently with green energy.



## Maximize Your Business Profits, Power Up Your Success!

We offer commercial & Industry energy storage solutions for global clients. Our systems ensure business continuity with reliable emergency power, optimize costs via smart peak-off-peak management, and enhance industrial efficiency, safeguarding continuous operations especially in critical sectors. Discover how our technology drives smarter, greener energy usage for your business.



## Your Energy, Your Community

Large-scale battery energy storage systems are a promising technology for increasing the share of renewable energy available to the grid and energy consumers. Eenovance G-Power 5016-L battery system is designed for utilities and large-scale commercial projects. It features a 20-foot standard container, with deep integration, safety, reliability, intelligence and high efficiency.





# Residential Storage Inverter

SQ 6kW-LV-1P Hpro | Single Phase



- Stronger Compatibility**
- IP65 design, more installation scenario
  - Smart fan control, less noise

- Scalable & Flexible**
- 10 units in parallel (single-phase) in on/off grid mode
  - 3 units in parallel to built three phase in on/off grid mode

- Easy Installation**
- Opened front panel for wiring easily
  - Wireless current limiter (CT) on grid side

- Smart Home**
- Multiple operating modes to optimize energy utilization
  - Remote real-time monitoring via WiFi/Bluetooth

## Datasheet



| Model                           | SQ 6kW-LV-1P Hpro            |                                   |                                 |
|---------------------------------|------------------------------|-----------------------------------|---------------------------------|
| <b>Battery Input Parameters</b> |                              | <b>PV String Input Parameters</b> |                                 |
| Supported battery type          | Li-Ion or Lead-acid          | Max. DC input power               | 4000 × 2=8000 W                 |
| Nominal battery voltage         | 48 V                         | Max. DC input voltage             | 500 V                           |
| Battery input voltage range     | 40~60 V                      | MPPT voltage range                | 120 ~ 450 V                     |
| Max. charge voltage             | ≤60 V (Configurable)         | Start-up voltage                  | 150 V                           |
| Max. charge / discharge current | 120 A / 130 A / Configurable | Max. input current                | 15 × 2 =30 A // 2 MPPT channels |
| Battery capacity (Recommend)    | 100~2000 Ah                  | PV Switch                         | Yes                             |
| Battery Communication           | CAN                          |                                   |                                 |

### AC Output Parameters (Back-Up) (Feed to essential load)

|                                   |  |
|-----------------------------------|--|
| Max. output power                 | 6000 W                                       |
| Max. / Peak output apparent power | 6000 VA / 12000 VA                           |
| Max. output current               | 28 A   |
| Nominal output voltage            | 220 V / 230 V / 240 V (Configurable) 1 phase |
| Nominal output frequency          | 50Hz / 60Hz (±0.2%) (Configurable)           |
| Max. bypass current               | 40 A   |
| Shift time (Bypass and inverter)  | 10ms   |
| Output THD (Resistor load)        | <3%  |

### AC Input Parameters (On-grid )(Bypass to essential load & Charge the battery/ Feed to home load) (GEN)

|   |                                       |
|---|---------------------------------------|
| Max. (apparent) power for bypass / battery charging/home load feeding | 6000 W                                |
| Nominal input / output voltage  | 220 V / 230 V / 240 V (Auto adjusted) |
| Nominal input / output frequency                                      | 50Hz / 60Hz (Auto adjusted)           |
| Max. bypass current   | 40 A                                  |
| Shift time (Bypass and inverter)                                      | 10ms                                  |
| Sell Power to Grid  | Yes                                   |
| Parallel Function   | Max. 10 units in parallel             |
| Indepent Generator Port   | Yes                                   |

### Efficiency

|                                 |        |
|---------------------------------|--------|
| Max. efficiency                 | 97.60% |
| Max. battery to load efficiency | 94.00% |
| Europe efficiency               | 97.00% |
| MPPT efficiency                 | 99.90% |

### Protection

|            |   |
|------------|---|
| Protection | Battery over charge / discharge,<br>Over temperature,<br>Output over load, Output short circuit,<br>Output over voltage |
|------------|---|

### Monitoring&HMI

|            |                                |
|------------|--------------------------------|
| Monitoring | WIFI / Bluetooth               |
| HMI        | 3.5 inch touchscreen interface |

### Certifications & Standards Compliance

|                   |  |
|-------------------|--|
| Grid regulation   | IEC 61727 / IEC 62116 / EN50549 / ABNT NBR / MEA,PEA (more available upon request) |
| Safety regulation | IEC / EN62109-1/2, IEC 62477-1   |
| EMC               | IEC / EN61000-6-1/3  |

### General Parameters

|                                     |                                 |
|-------------------------------------|---------------------------------|
| Ingress protection                  | IP65                            |
| Operating temperature range         | -25°C~60°C                      |
| Net weight / Gross weight           | 25 kg / 27 kg                   |
| Product size / Packing size (WxDxH) | 402×227×536 mm / 460×315×640 mm |



# Residential Storage Inverter

SQ 4kW/6kW-LV-1P Ecco | Single Phase



- Stronger Compatibility & Stability**
- Compatible with Li-ion and Lead-acid batteries
  - UPS 10ms switching time for seamless power continuity

- Easy Installation**
- Opened front panel for wiring
  - Small in size, light in weight
  - Free IP41 magnetic dust cover

- High Efficiency**
- Max. efficiency up to 97.6%
  - High battery input current up to 130A
  - Zero export control to make full use of PV power

- Smart Home**
- User-friendly segment display interface and operation buttons
  - Remote real-time monitoring via WiFi/Bluetooth

## Datasheet



| Model  | SQ 4kW-LV-1P Ecco  | SQ 6kW-LV-1P Ecco                            |
|--|--|--|
| Battery Input Parameters   |  |  |
| Supported battery type   | Li-Ion or Lead-acid  | Li-Ion or Lead-acid                          |
| Nominal battery voltage  | 48 V   | 48 V   |
| Battery input voltage range  | 40~60 V  | 40~60 V                                      |
| Max. charge voltage  | ≤60 V (Configurable)   | ≤60 V (Configurable)                         |
| Max. charge / discharge current  | 60 A (Configurable) / 80 A (Configurable)  | 100 A (Configurable) / 130 A (Configurable)  |
| Battery capacity (Recommend)   | 70~1000 Ah   | 100~2000 Ah                                  |
| Battery Communication  | CAN  | CAN  |
| PV String Input Parameters   |  |  |
| Max. DC input power  | 4500 W   | 4000 x 2=8000 W                              |
| Max. DC input voltage  | 500 V  | 500 V  |
| MPPT voltage range   | 120 ~ 450 V  | 120 ~ 450 V                                  |
| Start-up voltage   | 150 V  | 150 V  |
| Max. input current   | 15 A // 1 MPPT channels  | 15 × 2 =30 A // 2 MPPT channels              |
| AC Output Parameters (Back-Up) (Feed to essential load)  |  |  |
| Max. output power  | 4000 W   | 6000 W                                       |
| Max. / Peak output apparent power  | 4000 VA / 8000 VA  | 6000 VA / 12000 VA                           |
| Max. output current  | 18 A   | 26 A   |
| Nominal output voltage   | 220 V / 230 V / 240 V (Configurable) 1 phase   | 220 V / 230 V / 240 V (Configurable) 1 phase |
| Nominal output frequency   | 50Hz / 60Hz (±0.2%) (Configurable)   | 50Hz / 60Hz (±0.2%) (Configurable)           |
| Max. bypass current  | 40 A   | 40 A   |
| Shift time (Bypass and inverter)   | 10ms   | 10ms   |
| Output THD (Resistor load)   | <3%  | <3%  |
| AC Input Parameters (On-grid )(Bypass to essential load & Charge the battery/ Feed to home load) |  |  |
| Max. (apparent) power for bypass/ battery charging / home load feeding                           | 4000 W   | 6000 W                                       |
| Nominal input / output voltage   | 220 V / 230 V / 240 V (Auto adjusted)  | 220 V / 230 V / 240 V (Auto adjusted)        |
| Nominal input / output frequency   | 50Hz / 60Hz (Auto adjusted)  | 50Hz / 60Hz (Auto adjusted)                  |
| Max. bypass current  | 40 A   | 40 A   |
| Shift time (Bypass and inverter)   | 10ms   | 10ms   |
| Efficiency   |  |  |
| Max. efficiency  | 97.60%   | 97.60%                                       |
| Max. battery to load efficiency  | 94.00%   | 94.00%                                       |
| Europe efficiency  | 97.00%   | 97.00%                                       |
| MPPT efficiency  | 99.90%   | 99.90%                                       |
| Protection   |  |  |
| Protection   | Battery over charge / discharge, Over temperature, Output over load, Output short circuit, Output over voltage |  |
| Monitoring&HMI   |  |  |
| Monitoring   | WIFI / Bluetooth   | WIFI / Bluetooth                             |
| HMI  | 3 inch Segment display interface   | 3 inch Segment display interface             |
| Certifications & Standards Compliance  |  |  |
| Grid regulation  | IEC 61727 / IEC 62116 / MEA, PEA (more available upon request)   |  |
| Safety regulation  | IEC / EN62109-1/2, IEC 62477-1   | IEC / EN62109-1/2, IEC 62477-1               |
| EMC  | IEC / EN61000-6-1/3  | IEC / EN61000-6-1/3                          |
| General Parameters   |  |  |
| Ingress protection   | IP20   | IP20   |
| Operating temperature range  | -25°C~60°C   | -25°C~60°C                                   |
| Net weight / Gross weight  | 10 kg / 12 kg  | 13.7 kg / 16 kg                              |
| Product size / Packing size (WxDxH)  | 307×133×430 mm / 420×220×520 mm  | 353×134×500 mm / 485×243×620 mm              |

# Residential Battery

MANA 5.3/10.6/14.33 | Low Voltage



**Safe and Reliable**  
Meet diverse home energy needs with LFP batteries that last up to 6,000 cycles, ensuring safety and reliability.

**Hassle-Free Setup**  
Easily choose between floor or wall installation, and effortless maintenance.

**Flexible and Expandable**  
Easily connect up to 15 units in parallel, don't worry about future power increases in your home.

**Smart Home**  
Use your smartphone to control your home energy freely.

## Datasheet

CE UN38.3 UK IEC RoHS

| Model | MANA 5.3 | MANA 10.6 | MANA 14.33 |
|-------|----------|-----------|------------|
|-------|----------|-----------|------------|

|                                      |                             |                |             |
|--------------------------------------|-----------------------------|----------------|-------------|
| <b>Performance</b>                   |                             |                |             |
| Cell technology                      | LFP ( LiFePO <sub>4</sub> ) |                |             |
| Battery usable energy [1]            | 5.324 kWh                   | 10.649 kWh     | 14.33kWh    |
| Nominal voltage                      | 51.2 V                      | 51.2 V         | 51.2V       |
| Operating voltage                    | 44.8 - 56.16 V              | 44.8 - 56.16 V | 44.8~56.16V |
| Max.charge and discharge current [2] | 100 A                       | 200 A          | 280A        |

|                      |                                     |
|----------------------|-------------------------------------|
| <b>Communication</b> |                                     |
| Display              | SOC status indicator, LED indicator |
| Communication        | CAN / RS485 / RS232 / Wi-Fi         |

|                              |  |                    |                                      |
|------------------------------|--|--------------------|--------------------------------------|
| <b>General Specification</b> |  |                    |                                      |
| Dimension (W×D×H)            | 450×150×533 mm   | 550×160×836 mm     | 700×250×758.5 mm                     |
|                              | 17.7×5.9×21.0 inch   | 21.7×6.3×32.9 inch | 27.5×9.8×29.8 inch                   |
| Weight                       | 46 kg (101.4 lbs)  | 89 kg (196.2 lbs)  | 141kg (310.81 lbs)                   |
| Installation                 | Floor stand or wall mounted  |                    |                                      |
| Operating temperature [3]    | Charge : 0 to 50°C (32 to 122°F)                                     |                    | Charge: 0 to 55°C (32 to 131°F)      |
|                              | Discharge: -15 to 50°C (5 to 122°F)                                  |                    | Discharge: -20 to 55°C (-4 to 131°F) |
| Environmental humidity       | ≤ 95%RH (No condensation)  |                    |                                      |
| Ingress protection rating    | IP 20  |                    |                                      |
| Cycle life [4]               | 6000 Cycles or ten (10) years @ 80% DOD / 25°C / 0.5C, 70% EOL       |                    |                                      |
| Scalability                  | Max 15 batteries in parallel   |                    |                                      |
| Application                  | ON Grid / ON Grid + Backup / OFF grid                                |                    |                                      |
| Compatible inverters         | Refer to compatible inverter list (Compatible with major PCS brands) |                    |                                      |

|                            |  |
|----------------------------|--|
| <b>Standard Compliance</b> |  |
| Compliance                 | UN38.3 / IEC62619 / IEC61000 (More available upon request) |

|                                      |                         |                          |                           |
|--------------------------------------|-------------------------|--------------------------|---------------------------|
| <b>Ordering and Deliverable Part</b> |                         |                          |                           |
| Part                                 | MANA 5.3 Battery        | MANA 10.6 Battery        | MANA 14.33 Battery        |
|                                      | MANA 5.3 Parallel cable | MANA 10.6 Parallel cable | MANA 14.33 Parallel cable |
|                                      | MANA 5.3 to PCS cable   | MANA 10.6 to PCS cable   | MANA 14.33 to PCS cable   |

[1] Test conditions: 100% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.  
[2] There is 0.5C or 1C configurations optional in factory default.  
[3] Charge/discharge derating occurs when the temperature is below 0°C or above 45°C.  
[4] Please refer to the Warranty Letter for applicable conditions, the warranty is due whichever comes first.



# Residential Battery

## MANA 5.12 Ultra | Low Voltage



**Safe and Reliable**  
Meet diverse home energy needs with LFP batteries that offer 6000 cycles for longer-lasting performance, and with IP65 protection, ensuring higher safety for your peace of mind.

**Flexible and Expandable**  
Easily connect up to 15 units in parallel, don't worry about future power increases in your home.

**Hassle-Free Setup**  
Easily choose between floor or wall installation, and effortless maintenance.

**Smart Home**  
Use your smartphone to control your home energy freely.

## Datasheet

CE UN38.3 UL UK IEC RoHS

| Model | MANA 5.12 Ultra |
|-------|-----------------|
|-------|-----------------|

### Performance

|                                       |                             |
|---------------------------------------|-----------------------------|
| Cell technology                       | LFP ( LiFePO <sub>4</sub> ) |
| Battery usable energy [1]             | 5.120 kWh                   |
| Nominal voltage                       | 51.2 V                      |
| Operating voltage                     | 44.8 - 56.16 V              |
| Max. charge and discharge current [2] | 100 A                       |

### Communication

|               |                                     |
|---------------|-------------------------------------|
| Display       | SOC status indicator, LED indicator |
| Communication | CAN / RS485 / RS232 / Wi-Fi         |

### General Specification

|                           |  |
|---------------------------|--|
| Dimension (W×D×H)         | 470×160×635 mm   |
|                           | 18.5×63×25 inch  |
| Weight                    | 48.8 kg (107.5 lbs)  |
| Installation              | Floor stand or wall mounted  |
| Operating temperature [3] | Charge: 0 to 50°C (32 to 122°F) Discharge: -15 to 50°C (5 to 122°F)  |
| Environmental humidity    | ≤ 95%RH (No condensation)  |
| Ingress protection rating | IP 65  |
| Cycle life [4]            | 6000 Cycles or ten (10) years @ 80% DOD / 25°C / 0.5C, 70% EOL       |
| Scalability               | Max 15 batteries in parallel   |
| Application               | ON Grid / ON Grid + Backup / OFF grid                                |
| Compatible inverters      | Refer to compatible inverter list (Compatible with major PCS brands) |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / IEC62619 / IEC61000 / IEC62040-1 / FCC / UL1973 / UL9540A (More available upon request) |
|------------|--|

### Ordering and Deliverable Part

|      |                                |
|------|--------------------------------|
| Part | MANA 5.12 Ultra Battery        |
|      | MANA 5.12 Ultra Parallel cable |
|      | MANA 5.12 Ultra to PCS cable   |

(1) Test conditions: 100% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.  
(2) There is 0.5C or 1C configurations optional in factory default.  
(3) Charge/discharge derating occurs when the temperature is below 0°C or above 45°C.  
(4) Please refer to the Warranty Letter for applicable conditions, the warranty is due whichever comes first.

# Residential Battery

RT 5320 / RT 11.77 | Low Voltage



**Versatile Solutions**  
Meet diverse home energy needs with LFP batteries that last up to 6,000 cycles, ensuring safety and reliability.

**Hassle-Free Setup**  
Easily choose between rack, wall, or cabinet-mounted, and effortless maintenance.

**Flexible and Expandable:**  
Modular design, easily connect up to 15 units in parallel, don't worry about future power increases in your home.

**Smart Home**  
Use your smartphone to control your home energy freely.

## Datasheet

CE UN38.3 UK IEC RoHS

| Model                                | RT 5320                     | RT 11.77       |
|--------------------------------------|-----------------------------|----------------|
| <b>Performance</b>                   |                             |                |
| Cell technology                      | LFP ( LiFePO <sub>4</sub> ) |                |
| Battery usable energy [1]            | 5.324 kWh                   | 11.776 kWh     |
| Nominal voltage                      | 51.2 V                      | 51.2 V         |
| Operating voltage                    | 44.8 - 56.16 V              | 44.8 - 56.16 V |
| Max.charge and discharge current [2] | 104 A                       | 205 A          |

|                      |                                     |  |
|----------------------|-------------------------------------|--|
| <b>Communication</b> |                                     |  |
| Display              | SOC status indicator, LED indicator |  |
| Communication        | CAN/RS485 / RS232                   |  |

|                              |  |                    |
|------------------------------|--|--------------------|
| <b>General Specification</b> |  |                    |
| Dimension (W×D×H)            | 440×550×130 mm   | 440×600×220 mm     |
|                              | 17.3×21.7×5.1 inch   | 17.3×23.6×8.7 inch |
| Weight                       | 46 kg (101.4 lbs)  | 80 kg (176.4 lbs)  |
| Installation                 | Rack / Wall / Cabinet-Mounted  |                    |
| Operating temperature [3]    | Charge: 0 to 50°C (32 to 122°F) Discharge: -15 to 50°C (5 to 122°F)  |                    |
| Environmental humidity       | ≤ 95%RH (No condensation)  |                    |
| Ingress protection rating    | IP 20  |                    |
| Cycle life [4]               | 6000 Cycles or ten (10) years @ 80% DOD / 25°C / 0.5C, 70% EOL       |                    |
| Scalability                  | Max 15 batteries in parallel   |                    |
| Application                  | ON Grid / ON Grid + Backup / OFF grid                                |                    |
| Compatible inverters         | Refer to compatible inverter list (Compatible with major PCS brands) |                    |

|                            |  |  |
|----------------------------|--|--|
| <b>Standard Compliance</b> |  |  |
| Compliance                 | UN38.3 / IEC62619 / IEC61000 (More available upon request) |  |

|                                      |                        |                         |
|--------------------------------------|------------------------|-------------------------|
| <b>Ordering and Deliverable Part</b> |                        |                         |
| Part                                 | RT 5320 Battery        | RT 11.77 Battery        |
|                                      | RT 5320 Parallel cable | RT 11.77 Parallel cable |
|                                      | RT 5320 to PCS cable   | RT 11.77 to PCS cable   |

[1] Test conditions: 100% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.  
[2] There is 0.5C or 1C configurations optional in factory default.  
[3] Charge/discharge derating occurs when the temperature is below 0°C or above 45°C.  
[4] Please refer to the Warranty Letter for applicable conditions, the warranty is due whichever comes first.



# Residential Battery

CHAKRA 2.5-H Pro | High Voltage | 5.12kWh~25.6kWh



- Safe and Durable**  
The LFP battery cells offer 6,000 cycles of longevity and an IP65 rating for enhanced safety, ensuring reliable performance in any conditions.
- Hassle-Free Setup**  
Enjoy the convenience of plug-and-play installation—no external wiring required. Automatic ID assignment makes for quick and easy setup.
- Flexible and Expandable**  
With a 2.5 kWh modular design, each cluster supports up to 10 packs, connecting up to 4 clusters for versatile energy solutions.
- Smart Home**  
Control your home energy effortlessly via App or Web, keeping you connected anytime, anywhere.

## Datasheet

CE UN38.3 IEC RoHS

| Model | CHAKRA 2.5-H2 Pro | CHAKRA 2.5-H3 Pro | CHAKRA 2.5-H4 Pro | CHAKRA 2.5-H5 Pro  | CHAKRA 2.5-H6 Pro |
|-------|-------------------|-------------------|-------------------|--------------------|-------------------|
|       | CHAKRA 2.5-H7 Pro | CHAKRA 2.5-H8 Pro | CHAKRA 2.5-H9 Pro | CHAKRA 2.5-H10 Pro |                   |

### Performance

|                                      |                                  |                  |                  |               |                  |
|--------------------------------------|----------------------------------|------------------|------------------|---------------|------------------|
| Cell technology                      | LFP ( LiFePO <sub>4</sub> )      |                  |                  |               |                  |
| Battery module                       | 2.56 kWh, 51.2 V, 30 kg (67 lbs) |                  |                  |               |                  |
| Number of modules                    | 2                                | 3                | 4                | 5             | 6                |
|                                      | 7                                | 8                | 9                | 10            |                  |
| Battery usable energy [1]            | 5.12 kWh                         | 7.68 kWh         | 10.24 kWh        | 12.8 kWh      | 15.36 kWh        |
|                                      | 17.92 kWh                        | 20.48 kWh        | 23.04 kWh        | 25.60 kWh     |                  |
| Nominal voltage                      | 102.4V                           | 153.6V           | 204.8 V          | 256.0 V       | 307.2 V          |
|                                      | 358.4V                           | 409.6 V          | 460.8 V          | 512.0 V       |                  |
| Operating voltage                    | 89.6 - 112.32V                   | 134.4 - 168.48 V | 1792 - 224.64 V  | 224 - 280.8 V | 268.8 - 336.96 V |
|                                      | 313.6 - 393.12V                  | 358.4 - 449.28 V | 403.2 - 505.44 V | 448 - 561.6 V |                  |
| Max.charge and discharge current [2] | 50 A                             |                  |                  |               |                  |

### Communication

|               |                                     |
|---------------|-------------------------------------|
| Display       | SOC status indicator, LCD indicator |
| Communication | CAN / RS485 / RS232 / Wi-Fi         |

### General Specification

|                           |  |                     |                     |                     |                     |
|---------------------------|--|---------------------|---------------------|---------------------|---------------------|
| Dimension (W×D×H)         | 570×370×525 mm   | 570×370×665 mm      | 570×370×805 mm      | 570×370×945 mm      | 570×370×1085 mm     |
|                           | 22.4×14.6×20.6 inch  | 22.4×14.6×26.1 inch | 22.4×14.6×31.6 inch | 22.4×14.6×37.2 inch | 22.4×14.6×42.7 inch |
|                           | 570×370×1225 mm  | 570×370×1365 mm     | 570×370×1505 mm     | 570×370×1645 mm     |                     |
|                           | 22.4×14.6×48.2 inch  | 22.4×14.6×53.7 inch | 22.4×14.6×59.2 inch | 22.4×14.6×64.7 inch |                     |
| Weight                    | 86 kg (189.60 lbs)   | 117 kg (257.94 lbs) | 148 kg (326.28 lbs) | 179 kg (394.63 lbs) | 210 kg (462.97 lbs) |
|                           | 241 kg (531.3 lbs)   | 272 kg (599.66 lbs) | 303 kg (668.00 lbs) | 334 kg (736.34 lbs) |                     |
| Installation              | Floor stand  |                     |                     |                     |                     |
| Operating temperature [3] | Charge : 0 to 50°C (32 to 1227) Discharge: -20 to 50°C (-4 to 1227F) |                     |                     |                     |                     |
| Environmental humidity    | ≤ 95%RH (No condensation)  |                     |                     |                     |                     |
| Ingress protection rating | IP 65  |                     |                     |                     |                     |
| Cycle life [4]            | 6000 Cycles or ten (10) years @ 80% DOD / 25°C/0.5C, 70% EOL         |                     |                     |                     |                     |
| Scalability               | Max 10 modules per stack, 4 stacks in parallel                       |                     |                     |                     |                     |
| Application               | ON Grid / ON Grid + Backup / OFF grid                                |                     |                     |                     |                     |
| Compatible inverters      | Refer to compatible inverter list (Compatible with major PCS brands) |                     |                     |                     |                     |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / IEC62619 / IEC62040-1 / IEC61000-6-2 / IEC1000-6-4 / IEC62477-1 (More available upon request) |
|------------|--|

### Ordering and Deliverable Part

|      |                      |
|------|----------------------|
| Part | CHAKRA 2.5-H Pro     |
|      | CHAKRA 2.5-H Pro-BCU |

[1] Test conditions: 100% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.  
[2] There is 0.5C or 1C configurations optional in factory default.  
[3] Charge/discharge derating occurs when the temperature is below 0°C or above 45°C.  
[4] Please refer to the Warranty Letter for applicable conditions, the warranty is due whichever comes first.

# Commercial Battery

RT 5.12-H | High Voltage | 20.48~61.44kWh



**Versatile Solutions**  
Meet diverse home energy needs with LFP batteries that last up to 6,000 cycles, ensuring safety and reliability.

**Hassle-Free Setup**  
Quick-connect coupling, facilitating easy wiring, and effortless maintenance.

**Flexible and Expandable**  
With a 5.12 kWh modular design, each cluster supports up to 12 packs, connecting up to 4 clusters for versatile energy solutions.

**Smart Home**  
Use your smartphone to control your home energy freely.

## Datasheet

CE UN38.3 IEC 

| Model | RT 5.12-H4 | RT 5.12-H5  | RT 5.12-H6  | RT 5.12-H7  | RT 5.12-H8 |
|-------|------------|-------------|-------------|-------------|------------|
|       | RT 5.12-H9 | RT 5.12-H10 | RT 5.12-H11 | RT 5.12-H12 |            |

### Performance

|                                      |                  |                  |                  |                  |                  |
|--------------------------------------|------------------|------------------|------------------|------------------|------------------|
| Cell technology                      | LFP ( LiFePO4)   |                  |                  |                  |                  |
| Number of modules                    | 4                | 5                | 6                | 7                | 8                |
|                                      | 9                | 10               | 11               | 12               |                  |
| Battery usable energy [1]            | 20.48 kWh        | 25.6 kWh         | 30.72 kWh        | 35.84 kWh        | 40.96 kWh        |
|                                      | 46.08 kWh        | 51.2 kWh         | 56.32 kWh        | 61.44 kWh        |                  |
| Nominal voltage                      | 204.8 V          | 256 V            | 307.2 V          | 358.4V           | 409.6 V          |
|                                      | 460.8 V          | 512V             | 563.2 V          | 614.4 V          |                  |
| Operating voltage                    | 179.2 - 224.64 V | 224.0 - 280.80 V | 268.8 - 336.96 V | 313.6 - 393.12 V | 358.4 - 449.28 V |
|                                      | 403.2 - 505.44 V | 448.0 - 561.60 V | 492.8 - 617.76 V | 537.6 - 673.92 V |                  |
| Max.charge and discharge current [2] | 100 A            |                  |                  |                  |                  |

### Communication

|               |   |
|---------------|---|
| Display       | SOC status indicator, LED indicator, LCD display        |
| Communication | CAN / RS485 / RS232                                     |
| Functions     | Remote upgrade, EMS, Real-time monitoring of local data |

### General Specification

|                           |  |                       |                       |                       |                       |
|---------------------------|--|-----------------------|-----------------------|-----------------------|-----------------------|
| Dimension (W×D×H)         | 566×630×2220 mm  |                       |                       |                       |                       |
|                           | 22.3×24.8×87.4 inch  |                       |                       |                       |                       |
| Weight                    | 327.5 kg (722.0 lbs)   | 370.5 kg (816.8 lbs)  | 413.5 kg (911.6 lbs)  | 456.5 kg (1006.4 lbs) | 499.5 kg (1101.2 lbs) |
|                           | 542.5 kg (1196.0 lbs)  | 585.5 kg (1290.8 lbs) | 628.5 kg (1385.6 lbs) | 671.5 kg (1480.4 lbs) |                       |
| Installation              | Floor stand  |                       |                       |                       |                       |
| Operating temperature [3] | Charge : 0 to 50°C (32 to 122°F) Discharge: -15 to 50°C (5 to 122°F) |                       |                       |                       |                       |
| Environmental humidity    | ≤ 95%RH (No condensation)  |                       |                       |                       |                       |
| Ingress protection rating | IP 20  |                       |                       |                       |                       |
| Cycle life [4]            | 6000 Cycles or ten (10) years @ 80% DOD / 25°C / 0.5C, 70% EOL       |                       |                       |                       |                       |
| Scalability               | Max 12 modules per stack, 4 stacks in parallel                       |                       |                       |                       |                       |
| Application               | ON Grid / ON Grid + Backup / Off grid                                |                       |                       |                       |                       |
| Compatible inverters      | Refer to compatible inverter list (Compatible with major PCS brands) |                       |                       |                       |                       |

### Standard Compliance

|            |   |
|------------|---|
| Compliance | UN38.3 / IEC62619 / IEC62040-1 / IEC61000-6-2 / IEC61000-6-4 / IEC62477-1 (More available upon request) |
|------------|---|

### Ordering and Deliverable Part

|      |                            |
|------|----------------------------|
| Part | RT-5.12-QC-A               |
|      | RT 5.12-H-BCU              |
|      | RT-R12-A                   |
|      | RT-DS-7                    |
|      | LED/LCD display (Optional) |

[1] Test conditions: 100% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.  
[2] There is 0.5C or 1C configurations optional in factory default.  
[3] Charge/discharge derating occurs when the temperature is below 0°C or above 45°C.  
[4] Please refer to the Warranty Letter for applicable conditions, the warranty is due whichever comes first.



# Commercial Battery

E-MATE-114R-229R | High Voltage | 114.6~229.3kWh



**Easy Maintenance**  
Standard rack&module design, reducing footprint and easing front maintenance.

**Cell Balancing Tech**  
Advanced cell balancing technology for optimal performance and efficient energy utilization.

**Safe and Reliable**  
LFP battery cells offer 6,000 cycles of longevity, self-developed 2-level/3-level BMS, and indoor battery rack with IP20.

**High-density Cell**  
Equipped with high-density battery cells, it maximizes energy capacity in a compact design to achieve cost savings and diverse business needs.

DatasheetUN38.3

| Model | E-MATE-114R | E-MATE-129R | E-MATE-143R | E-MATE-157R | E-MATE-172R | E-MATE-186R |
|-------|-------------|-------------|-------------|-------------|-------------|-------------|
|       | E-MATE-200R | E-MATE-215R | E-MATE-229R |             |             |             |

Performance

|                                   |  |                  |                  |                  |                  |                  |
|-----------------------------------|--|------------------|------------------|------------------|------------------|------------------|
| Cell technology                   | LFP ( LiFePO <sub>4</sub> )            |                  |                  |                  |                  |                  |
| Battery module                    | 14.336 kWh, 51.2 V, 110 kg (242.5 lbs) |                  |                  |                  |                  |                  |
| Number of modules                 | 8                                      | 9                | 10               | 11               | 12               | 13               |
|                                   | 14                                     | 15               | 16               |                  |                  |                  |
| Battery usable energy [1]         | 114.688 kWh                            | 129.024 kWh      | 143.36 kWh       | 157.696 kWh      | 172.032 kWh      | 186.368 kWh      |
|                                   | 200.704 kWh                            | 215.04 kWh       | 229.376 kWh      |                  |                  |                  |
| Nominal voltage                   | 409.6 V                                | 460.8 V          | 512V             | 563.2 V          | 614.4V           | 665.6 V          |
|                                   | 716.8 V                                | 768.0 V          | 819.2 V          |                  |                  |                  |
| Operating voltage                 | 358.4 - 449.28 V                       | 403.2 - 505.44 V | 448 - 561.6 V    | 492.8 - 617.76 V | 537.6 - 673.92 V | 582.4 - 730.08 V |
|                                   | 627.2 - 786.24 V                       | 672 - 842.4 V    | 716.8 - 898.56 V |                  |                  |                  |
| Max. charge and discharge current | 280 A                                  |                  |                  |                  |                  |                  |

Communication

|               |  |
|---------------|--|
| Display       | SOC status indicator, LED indicator, LCD display |
| Communication | Ethernet / CAN / RS485                           |

General Specification

|                           |   |                      |                      |                      |                      |                      |
|---------------------------|---|----------------------|----------------------|----------------------|----------------------|----------------------|
| Dimension (W×D×H)         | 1164×840×1776 mm  | 1164×840×1776 mm     | 1164×840×1776 mm     | 1164×840×2050 mm     | 1164×840×2050 mm     | 1721×840×1776 mm     |
|                           | 1721×840×1776 mm  | 1721×840×1776 mm     | 1721×840×1776 mm     |                      |                      |                      |
|                           | 45.8×33.1×69.9 inch   | 45.8×33.1×69.9 inch  | 45.8×33.1×69.9 inch  | 45.8×33.1×80.7 inch  | 45.8×33.1×80.7 inch  | 67.8×33.1×69.9 inch  |
|                           | 67.8×33.1×69.9 inch   | 67.8×33.1×69.9 inch  | 67.8×33.1×69.9 inch  |                      |                      |                      |
| Weight                    | 1130 kg (2491.2 lbs)  | 1240 kg (2733.7 lbs) | 1350 kg (2976.2 lbs) | 1540 kg (3395.1 lbs) | 1650 kg (3637.6 lbs) | 1760 kg (3880.1 lbs) |
|                           | 1870 kg (4122.6 lbs)  | 1980 kg (4365.2 lbs) | 2090 kg (4607.7 lbs) |                      |                      |                      |
| Installation              | Floor stand   |                      |                      |                      |                      |                      |
| Operating temperature [3] | Charge: 0 to 55°C (32 to 131°F) Discharge:-20 to 55°C (-4 to 131°F) |                      |                      |                      |                      |                      |
| Environmental humidity    | ≤ 95%RH (No condensation)   |                      |                      |                      |                      |                      |
| Ingress protection rating | IP 20   |                      |                      |                      |                      |                      |
| Cycle life [4]            | 6000 Cycles or ten (10) years @ 80% DOD / 25°C/ 0.5C, 70% EOL       |                      |                      |                      |                      |                      |
| Scalability               | Max 16 modules per stack, 10 stacks in parallel                     |                      |                      |                      |                      |                      |
| Application               | ON Grid / ON Grid + Backup / OFF grid                               |                      |                      |                      |                      |                      |
| Compatible inverters      | Refer to compatible PCS list  |                      |                      |                      |                      |                      |

Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / (More available upon request) |
|------------|--|

Ordering and Deliverable Part

|      |                     |                     |                     |                     |                     |                     |
|------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Part | E-MATE-14.3-QC      |                     |                     |                     |                     |                     |
|      | E-MATE-BCU-M-114-QC | E-MATE-BCU-M-129-QC | E-MATE-BCU-M-143-QC | E-MATE-BCU-M-157-QC | E-MATE-BCU-M-172-QC | E-MATE-BCU-M-186-QC |
|      | E-MATE-BCU-M-200-QC | E-MATE-BCU-M-215-QC | E-MATE-BCU-M-229-QC |                     |                     |                     |
|      | E-MATE-R12          | E-MATE-R12          | E-MATE-R12          | E-MATE-R14          | E-MATE-R14          | E-MATE-R18          |
|      | E-MATE-R18          | E-MATE-R18          | E-MATE-R18          |                     |                     |                     |

[1] Test conditions: 100% depth of discharge (DOD), 0.2C rate charge & discharge at 25°C.  
[2] Charge/discharge derating occurs when the temperature is below 0°C or above 45°C.  
[3] Please refer to the Warranty Letter for applicable conditions, the warranty is due whichever comes first.


# C&I Energy Storage System

Air Cooling ESS (On&Off Grid Application)  
E-MATE 50-61-A | 50kW/61kWh



- Profit Maximization**  
Adapts to on-grid, off-grid, and hybrid modes for optimal revenue. Uses 4-channel MPPT PV DC bus to boost energy efficiency and profitability.
- Comprehensive Safety**  
Integrates multi-level alerts and fire suppression (gas, water, ventilation) for asset protection. Remote monitoring and real-time analysis ensure operational safety.
- Intelligent O&M**  
One-click management for remote monitoring, troubleshooting, and data analysis. Seamless grid-switching ensures reliable power supply.
- Modular Design**  
AC/DC integration simplifies installation and reduces costs. Modular structure allows for quick maintenance and upgrades.

## System Diagram

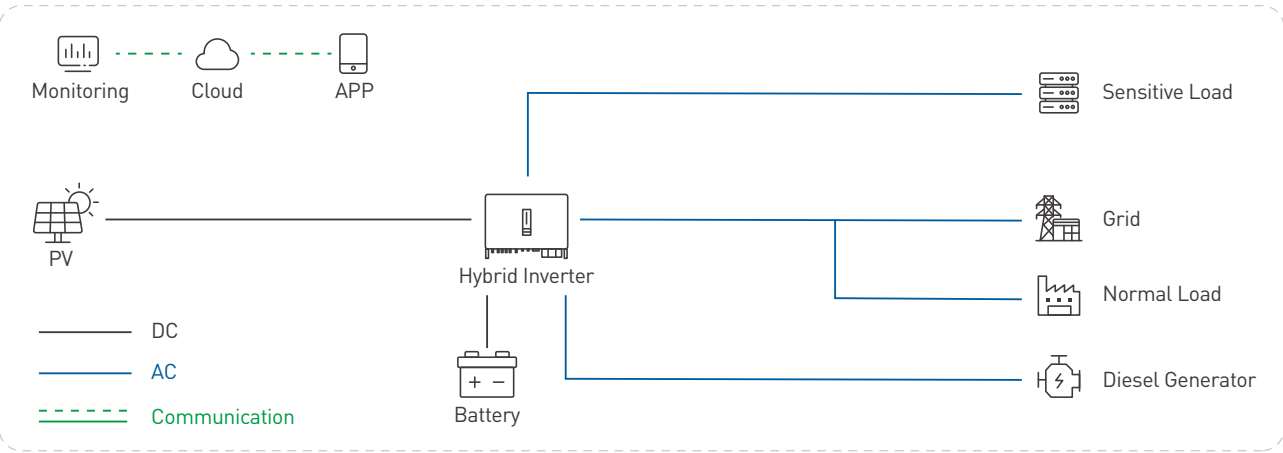

## Datasheet

CE UN38.3 IEC RoHS

| Model | E-MATE 50-61-A |
|-------|----------------|
|-------|----------------|

### Battery Side Parameters

|  |                    |
|--|--------------------|
| Cell technology                        | LFP-3.2 V / 100 Ah |
| Battery module                         | 5.12 kWh, 51.2 V   |
| Number of packs                        | 12                 |
| Battery system rated capacity          | 61.44 kWh          |
| Battery system rated voltage           | 614.4 V            |
| Battery system rated current           | 80 A               |
| Battery system voltage range           | 480 V - 700.8 V    |
| Battery system charge / discharge rate | 0.8P               |

### AC Side Parameters

|                                 |                                    |
|---------------------------------|------------------------------------|
| Rated output power              | 50 kW                              |
| Rated grid voltage              | 3L / N / PE220 / 380, 230 / 400Vac |
| Maximum output current          | 76 A                               |
| Allowable grid voltage range    | 230 V - 400 V                      |
| Rated grid frequency            | 50Hz / 60Hz                        |
| Output THDi                     | < 3%                               |
| Power factor                    | -1~1                               |
| Overload capacity               | 110% (long term), 120% (1 min)     |
| On/Off grid switching time      | < 20ms                             |
| Charge/discharge switching time | < 100ms                            |
| Maximum efficiency              | 97.80%                             |

### PV Side Parameters

|                       |  |
|-----------------------|--|
| PV side voltage range | 150 V - 850 V (full power above 500 V) |
| DC maximum current    | 4*30A                                  |
| DC maximum power      | 75 kW                                  |
| MPPT quantity         | 4                                      |

### Other Parameters

|                           |   |
|---------------------------|---|
| Dimension (W×D×H)         | 735×1045×2235 mm<br>29×41×88 inch   |
| Weight                    | 1220 kg (2689.6 lbs)  |
| Operating temperature     | -30°C~+55°C (-22°F~+131°F) (Derating Below - 15°C or above 45°C)  |
| Relative humidity         | 0~95% (No condensation)   |
| Maximum working altitude  | 3000 m (> 2000 m Derating)  |
| Noise                     | ≤75dB   |
| Ingress protection rating | IP55  |
| Heat dissipation method   | Forced air cooling  |
| Firefighting              | Aerosol: module-level (optional) + stack-level, water firefighting, combustible gas detection and exhaust |
| Communication             | CAN / RS485 / TCP   |
| Cycle life                | 6000 cycles (25±2°C, 0.5P / 0.5P, 70% SOH)  |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / UN3480 / IEC62619 / IEC61000 / IEC62477-1 / CQC (More available upon request) |
|------------|--|

# C&I Energy Storage System


Air Cooling ESS (On Grid Application)  
E-MATE 100-221-A | 100kW/221kWh



- Profit Maximization**  
Supports peak shaving, demand response, and grid expansion for max revenue.
- Intelligent O&M**  
One-click management, remote monitoring, and seamless grid switching for hassle-free operation.

- Safety System**  
Integrates multi-level warnings (gas/water fire protection, exhaust) for asset safety. Efficient thermal management ensures long-term stability.
- Integrated Design**  
Front-access, modular, and AC/DC integrated for easy deployment and maintenance.

## System Diagram

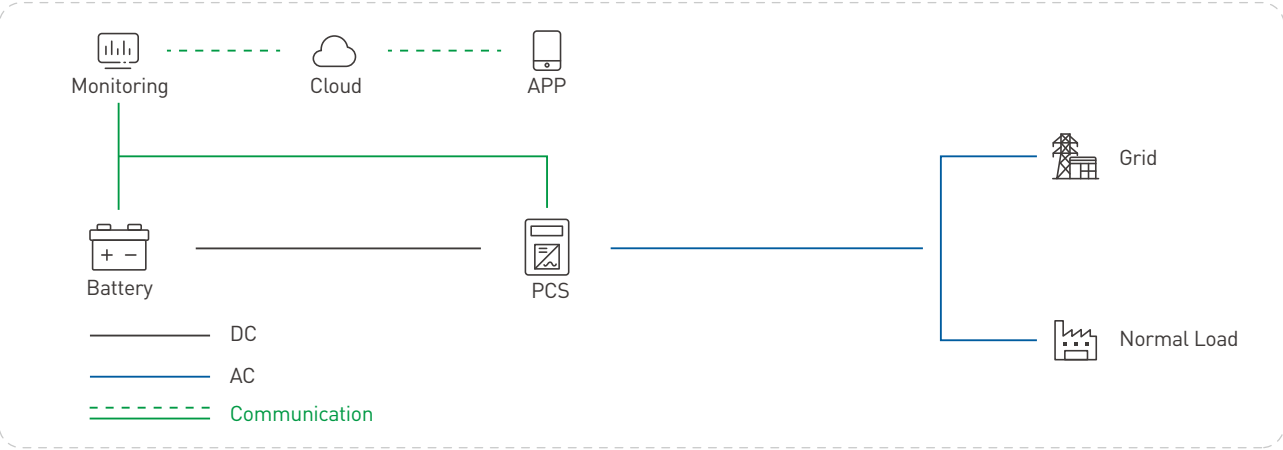

## Datasheet

CE UN38.3 IEC IEC62119 IEC61000

| Model | E-MATE 100-221-A |
|-------|------------------|
|-------|------------------|

### Battery Side Parameters

|  |                    |
|--|--------------------|
| Cell technology                        | LFP-3.2 V / 314 Ah |
| Battery module                         | 20. 096 kWh, 64 V  |
| Number of packs                        | 11                 |
| Battery system rated capacity          | 221.056 kWh        |
| Battery system rated voltage           | 704 V              |
| Battery system rated current           | 157 A              |
| Battery system voltage range           | 616 V - 792 V      |
| Battery system charge / discharge rate | 0.5P               |

### AC Side Parameters

|                                   |                               |
|-----------------------------------|-------------------------------|
| Rated output power                | 100 kW                        |
| Rated grid voltage                | 400 V                         |
| Maximum output current            | 167 A                         |
| Allowable grid voltage range      | 340 V - 440 V                 |
| Rated grid frequency              | 50Hz / 60Hz                   |
| Output THDi                       | < 3%                          |
| Power factor                      | -1~1                          |
| AC output format                  | 3W+PE                         |
| Overload capacity                 | 110% (long-term), 120% (1min) |
| Charge / discharge switching time | <100ms                        |
| Maximum efficiency                | 98.5%                         |

### Other Parameters

|                           |   |
|---------------------------|---|
| Dimension (W×D×H)         | 1380×1540×2330 mm   |
|                           | 54×61×90 inch   |
| Weight                    | 2750 kg (6062.71 lbs)   |
| Operating temperature     | -30°C~+55°C [-22°F~+ 131°F] [Derating below -15°C or above 45°C]  |
| Relative humidity         | 0 ~ 95% (No condensation)   |
| Maximum working altitude  | 3000m (> 2000m Derating)  |
| Noise                     | ≤75dB   |
| Ingress protection rating | IP55  |
| Heat dissipation method   | Forced air cooling  |
| Firefighting              | Aerosol: module-level (optional) + stack-level, water firefighting, combustible gas detection and exhaust |
| Communication             | CAN / RS485 / TCP   |
| Cycle life                | 8000 cycles (25±2°C, 0.5P / 0.5P, 70% SOH)  |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / UN3480 / IEC62619 / IEC61000 / IEC62477-1 / CQC (More available upon request) |
|------------|--|



# C&I Energy Storage System

Liquid Cooling ESS (On Grid Application)  
E-MATE 200-233-L | 200kW/233kWh




**Profit Maximization**  
One-to-one management for batteries cluster, reduces thermal risks, prevents inter-cluster issues, enhances stability, lowers costs, and adapts to various scales.

**Intelligent O&M**  
One-click management, remote monitoring, and seamless grid switching for hassle-free operation.

**Safety System**  
Integrates multi-level warnings (gas/water fire protection, exhaust) for your asset safety.

**High Rate System**  
Equipped with advanced 1C high-capacity cells, it easily empowers you to handle high-demand scenarios like frequency modulation and capacity expansion.

## System Diagram

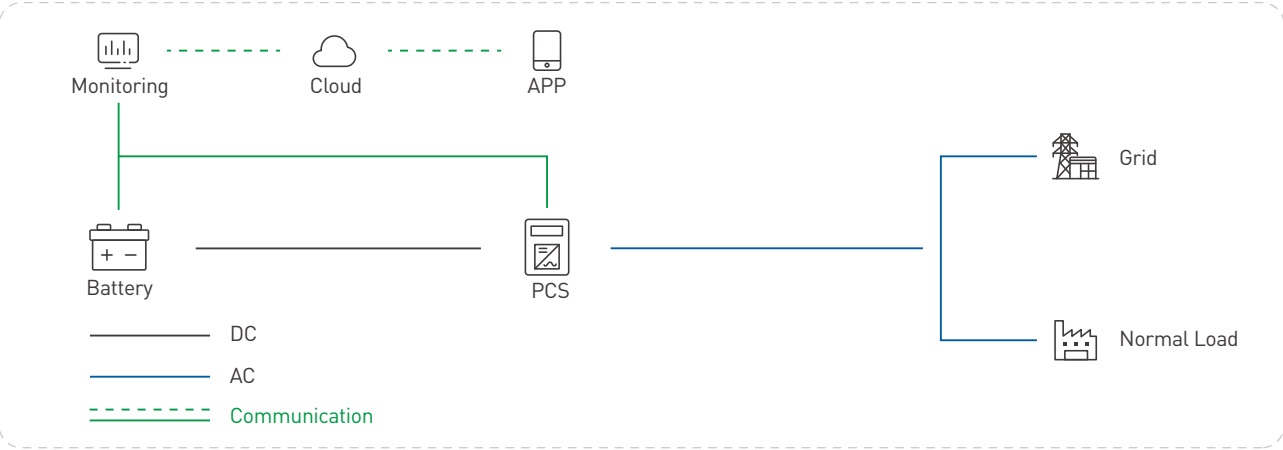

## Datasheet

CE UN38.3 IEC IEC62619

| Model | E-MATE 200-233-L |
|-------|------------------|
|-------|------------------|

### Battery Side Parameters

|  |                     |
|--|---------------------|
| Cell technology                        | LFP-3.2 V / 280 Ah  |
| Battery module                         | 46.592 kWh, 166.4 V |
| Number of packs                        | 5                   |
| Battery pack protection level          | IP67                |
| Battery system rated capacity          | 232.96 kWh          |
| Battery system rated voltage           | 832 V               |
| Battery system rated current           | 280 A               |
| Battery system voltage range           | 650 V - 949 V       |
| Battery system charge / discharge rate | 1P                  |

### AC Side Parameters

|                                 |                                |
|---------------------------------|--------------------------------|
| Rated power                     | 200 kW                         |
| Rated voltage                   | 400V±15%                       |
| Rated frequency                 | 50Hz / 60Hz                    |
| Maximum output current          | 334 A                          |
| Power factor                    | -1~1                           |
| Charge/discharge switching time | < 100ms                        |
| PCS maximum efficiency          | 98.5%                          |
| Overload capacity               | 110% (long-term), 120% (1 min) |

### Other Parameters

|                           |   |
|---------------------------|---|
| Dimension (W×D×H)         | 1000×1450×2300 mm                               |
|                           | 39.37×57.09×90.55 inch                          |
| Weight                    | 2500 kg (5511.56 lbs)                           |
| Heat dissipation method   | Liquid cooling                                  |
| Ingress protection rating | IP55  |
| Firefighting              | Aerosol + combustible gas detection and exhaust |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / EN 62477-1 / EN IEC 61000-6-2 / EN IEC 61000-6-4 / IEC62619 |
|------------|--|


# C&I Energy Storage System

Liquid Cooling ESS (On Grid Application)  
E-MATE 200-418-L | 200kW/418kWh



- Profit Maximization**  
One-to-one management for batteries cluster; reduces thermal risks, prevents inter-cluster issues, enhances stability, lowers costs, and adapts to various scales.
- Comprehensive Safety**  
Multi-level warnings (gas/water fire protection, exhaust) ensure safety. Efficient thermal management (temp. diff. ≤3°C, rise <7°C) extends lifespan and ensures stability.
- Intelligent O&M**  
One-click management, remote monitoring, fault diagnosis, and seamless grid switching ensure continuous, reliable power with reduced on-site workload.
- Highly Integrated Design**  
Front-access, modular, and AC/DC integrated for easy deployment, maintenance, and cost-effective installation.

## System Diagram

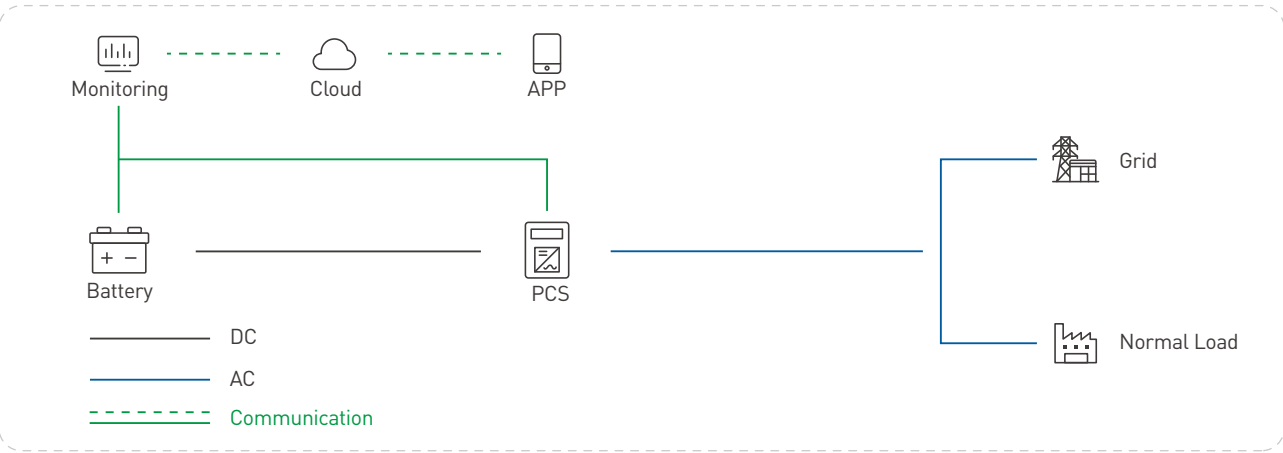

## Datasheet

CE UN38.3 IEC RoHS

| Model | E-MATE 200-418-L |
|-------|------------------|
|-------|------------------|

### Battery Side Parameters

|  |                    |
|--|--------------------|
| Cell technology                        | LFP-3.2 V / 314 Ah |
| Battery module                         | 52.25 kWh, 166.4 V |
| Number of packs                        | 8                  |
| Battery system rated capacity          | 418 kWh            |
| Battery system rated voltage           | 1331.2 V           |
| Battery system voltage range           | 1040 V - 1497.6 V  |
| Battery system charge / discharge rate | 0.5P               |

### AC Side Parameters

|                                   |                                |
|-----------------------------------|--------------------------------|
| Rated output power                | 200 kW                         |
| Rated grid voltage                | 690V±15%                       |
| Maximum output current            | 184.1 A                        |
| Allowable grid voltage range      | 3W+PE, -15% ~+10% (Settable)   |
| Rated grid frequency              | 50Hz / 60 Hz                   |
| Output THDi                       | < 3%                           |
| Power factor                      | -1~1                           |
| Overload capacity                 | 110% (long term), 120% (1 min) |
| Charge / discharge switching time | < 100ms                        |
| Maximum efficiency                | 99%                            |

### Other Parameters

|                           |  |
|---------------------------|--|
| Dimension (W×D×H)         | 1500×1450×2350 mm  |
|                           | 59×57×93 inch  |
| Weight                    | 3560 kg (7848.46 lbs)  |
| Operating temperature     | -30°C~+55°C (-22°F~+131°F) [Derating below - 15°C or above 45°C]                               |
| Relative humidity         | 0 ~ 95% (No condensation)  |
| Maximum working altitude  | 3000m (> 2000m Derating)   |
| Noise                     | ≤75dB  |
| Ingress protection rating | Liquid cooling   |
| Heat dissipation method   | IP55   |
| Firefighting              | Aerosol: module-level + stack-level, water firefighting, combustible gas detection and exhaust |
| Communication             | CAN / RS485 / TCP  |
| Cycle life                | 8000 cycles (25±2°C, 0.5P/0.5P, 70% SOH)   |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / UN3480 / IEC62619 / IEC61000 / IEC62477-1 / CQC (More available upon request) |
|------------|--|


# Battery Energy Storage System

G-Power 5016-L | 5.016MWh



- Comprehensive Protection**  
Integrated multi-level alerts and fire systems to keep your assets secure from every angle.
- Long-lasting Performance**  
Efficient thermal management keeps temperature differences within  $\leq 3^{\circ}\text{C}$  and temperature rise under  $< 7^{\circ}\text{C}$ , enhancing performance and lifespan.
- Easy Maintenance**  
Front-access and modular design make station deployment simpler, reducing footprint and easing maintenance.
- Smart Expansion & Operations**  
Flexible parallel support and smart EMS for remote monitoring and diagnostics help you boost operational efficiency with ease.

## System Diagram

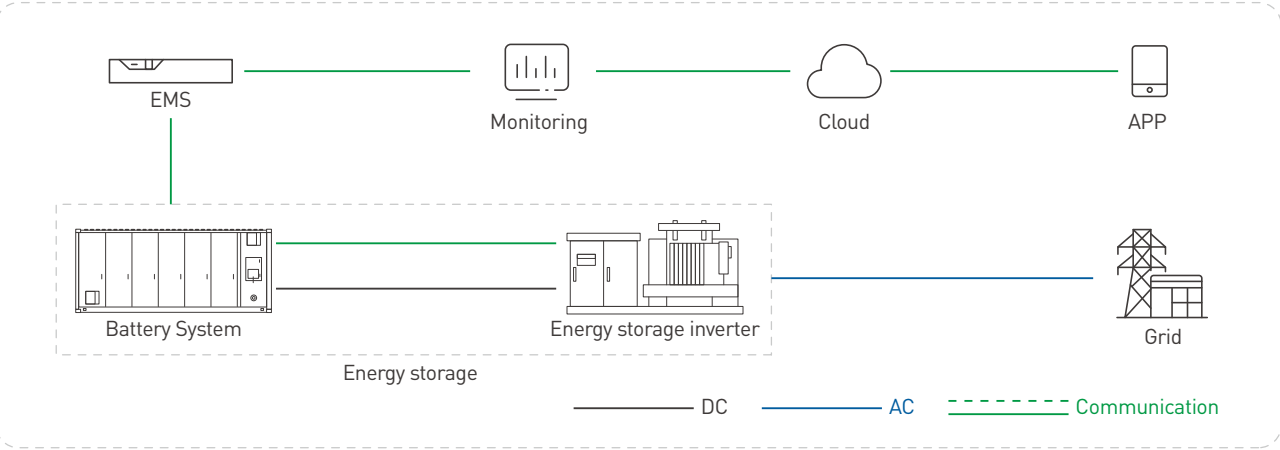

## Datasheet

CE UN38.3 IEC RoHS

| Model | G-Power 5016-L |
|-------|----------------|
|-------|----------------|

### Battery Side Parameters

|  |                    |
|--|--------------------|
| Cell technology                        | LFP-3.2 V / 314 Ah |
| Battery pack configuration             | 1P104S             |
| Battery cluster configuration          | 1P416S             |
| System configuration                   | 12*1P416S          |
| Rated power                            | 5.016 MWh          |
| Rated voltage                          | 1331.2 V           |
| Battery voltage range                  | 1040 V - 1497.6 V  |
| Battery system charge / discharge rate | 0.5P               |

### Other Parameters

|                             |  |
|-----------------------------|--|
| Dimension (W×D×H)           | 6058×2438×2896 mm<br>238.5×96×114 inch   |
| Weight                      | 40T-45T (88184.9 lbs-99208.0 lbs)  |
| Operating temperature range | -30°C~+55°C [-22°F~+ 131°F] (Derating below -15°C or above 45°C)   |
| Relative humidity           | 5 ~ 95% (No condensation)  |
| Maximum working altitude    | 3000 m (> 2000 m Derating)   |
| Noise                       | ≤75dB  |
| Ingress Protection Rating   | IP55   |
| Firefighting                | Aerosol: module-level + containerized-level, water firefighting, combustible gas detection and exhaust, explosion venting design |
| Heat dissipation method     | Liquid cooling   |
| Communication               | CAN / RS485 / TCP  |
| Cycle life                  | 8000 cycles (25±2°C, 0.5P/0.5P, 70% SOH)   |

### Standard Compliance

|            |  |
|------------|--|
| Compliance | UN38.3 / UN3536 / IEC62619 / IEC61000 / IEC62477-1 / CQC (More available upon request) |
|------------|--|



# Commercial Battery Pack


E-MATE-BATT-1P20S-314-A



E-MATE-BATT-1P52S-314-L



E-MATE-BATT-1P104S-314-L

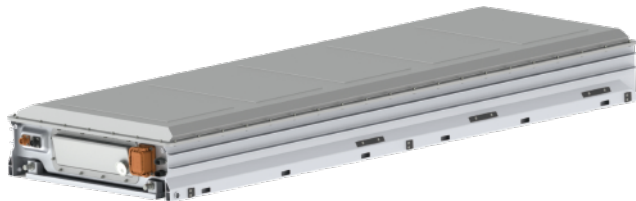

## Datasheet

| Model                     | E-MATE-BATT-1P20S-314-A |
|---------------------------|-------------------------|
| Basic Parameters          |                         |
| Configuration             | 1P20S                   |
| Rated capacity            | 314Ah                   |
| Rated voltage             | 64V                     |
| Rated energy              | 20.096kWh               |
| Charge and discharge rate | 0.5P                    |
| Cooling method            | Air cooling             |
| Dimension (WxDxH)         | 420x910x228 mm          |
| Weight                    | 142.6kg±2kg             |

| Model                     | E-MATE-BATT-1P52S-314-L |
|---------------------------|-------------------------|
| Basic Parameters          |                         |
| Configuration             | 1P52S                   |
| Rated capacity            | 314Ah                   |
| Rated voltage             | 166.4V                  |
| Rated energy              | 52.249kWh               |
| Charge and discharge rate | 0.5P                    |
| Cooling method            | Liquid cooling          |
| Dimension (WxDxH)         | 790x1140x247 mm         |
| Weight                    | 330kg±2kg               |

| Model                     | E-MATE-BATT-1P104S-314-L |
|---------------------------|--------------------------|
| Basic Parameters          |                          |
| Configuration             | 1P104S                   |
| Rated capacity            | 314Ah                    |
| Rated voltage             | 332.8V                   |
| Rated energy              | 104.499kWh               |
| Charge and discharge rate | 0.5P                     |
| Cooling method            | Liquid cooling           |
| Dimension (WxDxH)         | 2150x779x250 mm          |
| Weight                    | 690kg±5kg                |



# Smart Energy Management System

## Download the Eenovance APP

Manage your home energy effortlessly anytime, anywhere.  
Monitor and optimize your power station on the go for business success.



Real-time monitoring to prevent risks and prompt alerts for swift action.



Intelligent optimization, remote management, and extended equipment lifespan.




Precise assessments, early detection, and avoidance of unexpected shutdowns.



Accurate diagnostics, quick restoration, and improved operational efficiency.



Comprehensive data, informed decision-making, and optimized operations.

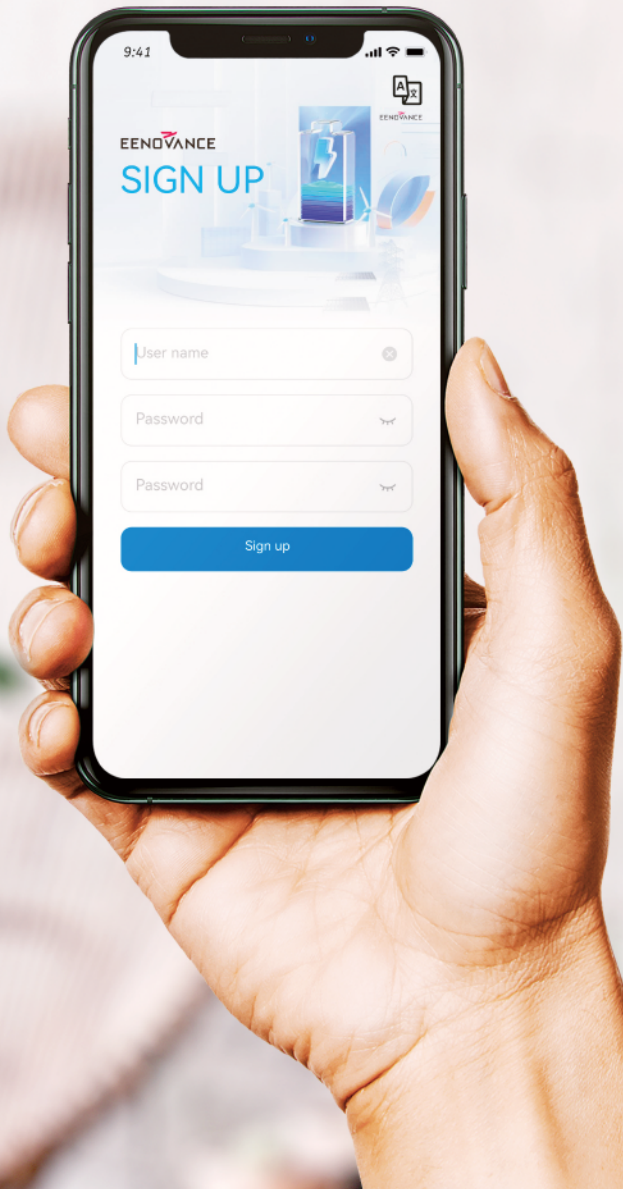

# Cases

## Residential Storage System Cases




15.96kWh\_MANA 5.3



10.65kWh\_MANA 10.6

10.65kWh\_MANA 5.3

## C&I Storage System Cases

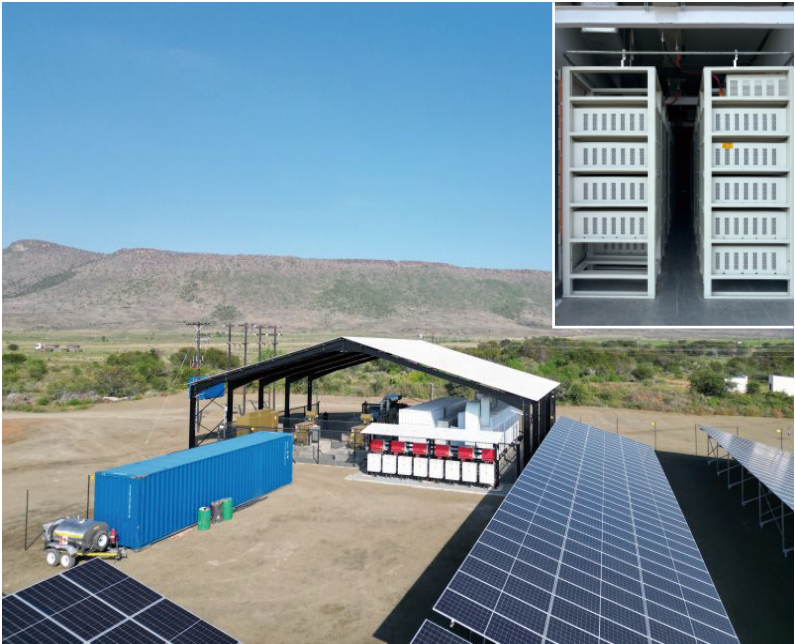

600kWh\_E-MATE 100-221-A



2.29MWh\_E-MATE-229R